

AD-A058 230

WASHINGTON STATE UNIV PULLMAN SHOCK DYNAMICS LAB
SHOCK-INDUCED DECOMPOSITION OF CARBON DISULFIDE.(U)
AUG 78 S A SHEFFIELD, G E DUVALL

F/G 7/2

N00014-77-C-0232


UNCLASSIFIED

WSU-SDL-78-04

NL

| OF |

AD
A058230



END

DATE

FILMED

10-78

DOC

LEVEL

II


12

SHOCK-INDUCED DECOMPOSITION OF CARBON DISULFIDE

Stephen A. Sheffield & George E. Duvall

Department of Physics
Washington State University
Pullman, WA 99164

Technical Report
August 1978



AD No. _____
DDC FILE COPY

ADA058230

Research Sponsored by the Office of Naval Research, Contract No.
N00014-77-C-0232; NR 092-558.

Reproduction in whole or in part is permitted for any purpose of
the United States Government.

Approved for public release: distribution unlimited.

78 08 28 126

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|--|---|---|
| 1. REPORT NUMBER WSU-SDL-78-04 | 2. GOVT ACCESSION NO. | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle) Shock-Induced Decomposition of Carbon Disulfide. | | 5. TYPE OF REPORT & PERIOD COVERED Technical, 4/1/77-3/31/78 |
| 7. AUTHOR(s) Stephen A. Sheffield and George E. Duval | 6. PERFORMING ORG. REPORT NUMBER WSU-SDL-78-04 | |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS Physics Department Washington State University Pullman, WA 99164 | | 8. CONTRACT OR GRANT NUMBER(s) N00014-77-C-0232 |
| 11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research 800 N. Quincy St. Arlington, VA 22217 | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NR 092-558 | |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Office of Naval Research Resident Representative University of Washington 3710 Brooklyn Ave., NE, Unit #2 Seattle, WA 98195 | 12. REPORT DATE August 1978 | |
| 13. NUMBER OF PAGES 11 | | 15. SECURITY CLASS. (of this report) UNCLASSIFIED |
| 16. DISTRIBUTION STATEMENT (of this Report) Technical rept. 1 Apr 77-31 Mar 78 Approved for public release; distribution unlimited | | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) | | |
| 18. SUPPLEMENTARY NOTES This report is a reproduction of a paper presented at the Symposium (International) on High Dynamic Pressures in Paris, France, August 28-September 1, 1978. | | |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Shock Waves Chemical Reactions Chemical Kinetics Liquids Carbon Disulfide | | |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Liquid carbon disulfide (CS ₂) was shocked by reflection to pressures where reaction occurs. Progress of shocks and reaction was monitored with electromagnetic particle velocity probes. Particle velocity waveforms show that a two-wave structure evolves in the reflected shock wave at pressures above about 75 kbar, with the character depending upon the pressure. Two wave evolution is accompanied by an induction time, followed simultaneously by particle velocity decay and a burst of decaying electrical noise; the | | |

DD FORM 1473
1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

403690

LB

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Block Number 20, continued:

noise decay takes longer than the particle velocity decay. Equation of state models were developed and used to calculate temperatures both before and after reaction. From these calculations and observations, it is hypothesized that a decomposition chemical reaction occurs in the shock.

| | | |
|---------------------------------|---------------|-------------------------------------|
| ACCESSION for | | |
| HTIS | White Section | <input checked="" type="checkbox"/> |
| DDC | Buff Section | <input type="checkbox"/> |
| UNANNOUNCED | | <input type="checkbox"/> |
| JUSTIFICATION..... | | |
| BY..... | | |
| DISTRIBUTION/AVAILABILITY CODES | | |
| Dist. AVAIL. and/or SPECIAL | | |
| A | | |

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SHOCK-INDUCED DECOMPOSITION OF CARBON DISULFIDE*

S. A. Sheffield** and G. E. Duvall

*Shock Dynamics Laboratory, Dept. of Physics
Washington State University, Pullman, WA 99164, USA*

Liquid carbon disulfide (CS_2) was shocked by reflection to pressures where reaction occurs. Progress of shocks and reaction was monitored with electromagnetic particle velocity probes. Particle velocity waveforms show that a two wave structure evolves in the reflected shock wave at pressures above about 75 kbar, with the character depending upon the pressure. Two wave evolution is accompanied by an induction time, followed simultaneously by particle velocity decay and a burst of decaying electrical noise; the noise decay takes longer than the particle velocity decay. Equation of state models were developed and used to calculate temperatures both before and after reaction. From these calculations and observations, it is hypothesized that a decomposition chemical reaction occurs in the shock.

INTRODUCTION

The utility of shock-wave methods in the study of phase transitions was established early through both dynamic measurements¹ and recovery experiments.² Yet their value in the study of chemical reactions in condensed matter has not been widely recognized, despite the role they have played in gas reactions.^{3,4} Most work on shock-induced chemical changes in liquids and solids has involved post-shock examination of recovered specimens,⁵⁻⁷ where pressure and time histories are but poorly known. Part of the reason


(*) The research reported here has been supported partially by the Dept. of Energy and partially by the Office of Naval Research, Contract No. N00014-77-C-0232.

(**) Present address: Sandia Laboratories, Albuquerque, NM 87115.

that shock-dynamic techniques have been little used in the study of condensed matter reactions is probably the limited information that can be obtained from measurement of macroscopic variables. If parameters being measured are limited to pressure, density, particle velocity and shock velocity, there is no sure way to distinguish between phase transitions and chemical reactions. Consideration of related information can help in making the distinction.

Liquids are more likely than most solids to react under shock because of their greater compressibility, which leads to high temperatures in the shocked state. A number of liquids have been studied and considerable effort has been directed toward the subject of liquid-to-solid phase transitions. Shock-induced changes have been reported in opacity⁸⁻¹⁰ and in electrical conductivity;¹¹⁻¹⁷ anomalous temperatures have been measured,¹⁰ and cusps have been reported in the (p,v) Hugoniot curves of a number of liquids.¹⁸⁻²⁰ Discontinuous changes in macroscopic properties have frequently been interpreted as phase transitions; but it is likely that many of these anomalies result from chemical reactions.

Explicit reference to reactions, particularly to decomposition and pyrolysis, has been made in some cases.^{17,20-22} The most complete study of a shock-induced reaction which has been reported to date is a lengthy study on acrylonitrile by Yakushev, Nabatov, and Yakusheva²² in which they observed a cusp in the Hugoniot at 43 kbar, based on shock velocity measurements. They also used an electromagnetic particle velocity gage and measured what appears to be a two-wave structure but they said the scatter in the data was so great that it was not possible to "establish unambiguously the nature of the second discontinuity in the mass velocity." Among several other tests, recovery experiments were done where the acrylonitrile was shocked to 240 kbar and then recovered. On examining the sample, they discovered the evolution of large amounts of ammonia, with a black velvet powder remaining; which was identified by x-ray diffraction as hexagonal graphite. Using these data they speculated that the decomposition reaction is



A review of this and other earlier work suggested to us that an effort to use shock-dynamic techniques to unravel the kinetics of a reaction in condensed matter might be profitable at this time. In screening candidate materials for such a study, it was required that

- i) anomalous behavior should be documented
- ii) there be a reasonable probability that the anomaly results from a chemical reaction
- iii) the material be of interest to chemists and that the molecule be a simple one
- iv) the ordinary chemical and physical properties be well established
- v) the material be readily available and not highly toxic
- vi) the shock pressures required to produce anomalous behavior be within reach of the WSU gas gun facility.

Acrylonitrile was a serious candidate, largely because of the work already done by Yakushev et al.,²² but CS₂ was finally selected because of its simpler molecular structure: S=C=S.

R. Dick, using explosives, has measured the Rankine-Hugoniot (p,v) curve for CS₂ and determined that a cusp exists at 62 kbar.²⁰ A graph of his data in the U_s-U_p plane is shown in Figure 1. The existence of a cusp implies that the end product of the reaction or transition has a higher density than the CS₂.

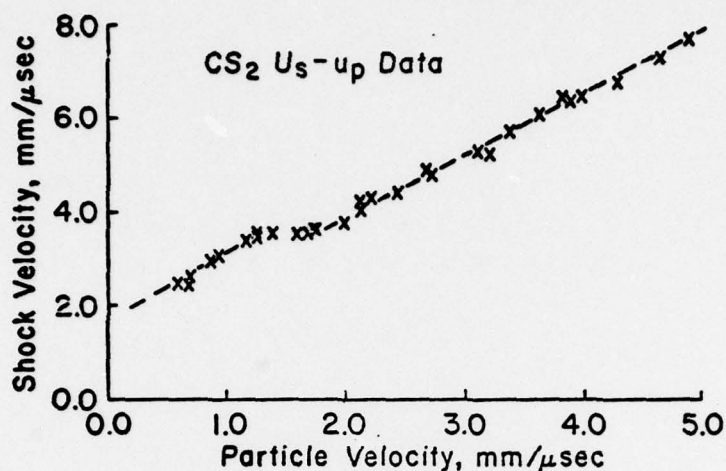


Figure 1. Shock measurements reported by R. Dick for CS_2 .²⁰

Butcher et al.²³ did a number of static high pressure tests at elevated temperatures on CS_2 to produce and study the "black solid CS_2 " Bridgman had discovered earlier. From their data and Bridgman's data, they constructed a diagram that is reproduced in Figure 2. They indicate that a black solid form of CS_2 is formed only in the relatively small region indicated in the figure and that, at temperatures and pressures above this, decomposition occurs. The region marked "decomposition" is where the shock results of Dick (with the reaction occurring) are located.

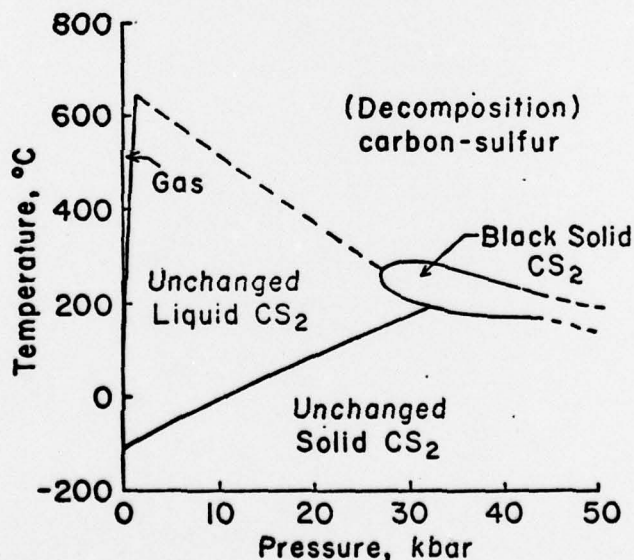


Figure 2. Temperature-pressure diagram constructed by Butcher et al. in Ref. 23. The cusp observed by R. Dick occurs well up into the region marked "Decomposition."

Afanasenkov et al.²¹ assumed that the Hugoniot cusp reported by Dick resulted from decomposition of CS_2 to elemental carbon and sulfur. They combined carbon and sulfur Hugoniots, using the stoichiometric ratio, to calculate a Hugoniot curve for the products. This curve went right through Dick's data above the cusp. They also measured temperature by a brightness technique and found it to be 3000°K , about 500°K higher than their calculations indicated it should be. From these results and the Butcher et al. measurements, they concluded that their initial assumption of decomposition was correct.

The goals of the work reported here were to

- (1) establish an experimental procedure for shocking the material into the region of reaction which can be adapted to later spectroscopic studies
- (2) establish by pressure and velocity, or equivalent, measurements the range of interesting experimental conditions
- (3) establish overall features of the reaction, such as induction time and reaction rates, as they affect observable macroscopic parameters.

EXPERIMENTAL DESIGN


The particle velocities at which the CS_2 undergoes transition are typically $1.35 \text{ mm}/\mu\text{sec}$ for a single shock and greater for a double shock. A double shock experiment, in which the second shock is produced by reflection, was chosen for two reasons.

- (1) The particle velocity required for reaction produced by a single shock is barely within reach of the WSU gas gun.
- (2) A reflection experiment gives finer control over the reacting state and opens the possibility for generating and monitoring a two-wave structure, which, according to R. Dick, is not present in the single shock experiment.

The experimental design is illustrated in Figure 3. The target was placed in a magnetic field during the shots so it was necessary to use a sapphire impactor when a high impedance material was required. A sapphire faced projectile drives a shock into the PMMA cell front, which then traverses the CS_2 as a relatively low pressure wave (state 1). When the shock reaches the sapphire back plate, a high pressure wave (state 3') is driven back into the already shocked CS_2 . The experiment can be designed so the high pressure wave is above the transition pressure and a reaction is observed. In this case the reflected wave splits into two waves, producing state 2 behind the first wave and state 3 behind the second wave. References made to a particular state in the remainder of this paper will be consistent with the designations of Figure 3c.

Progress of the shocks and the reaction were measured by imbedding several electromagnetic particle velocity (EMV) probes in the liquid sample so that both particle velocity and shock arrival times could be continuously recorded. From these records velocity can also be determined.

Since the experiments involve reshocking of the CS_2 , it is important to understand that the reshock Hugoniot is different from the principal Hugoniot, how different depends upon the compressibility of the material. CS_2 is quite compressible, so it is necessary to take into consideration the difference. Both the reshock and principal Hugoniots lie on the equilibrium equation of state surface for unreacted CS_2 , so the approach taken has been to develop a model for the equation of state and use it to calculate the reshock Hugoniot.

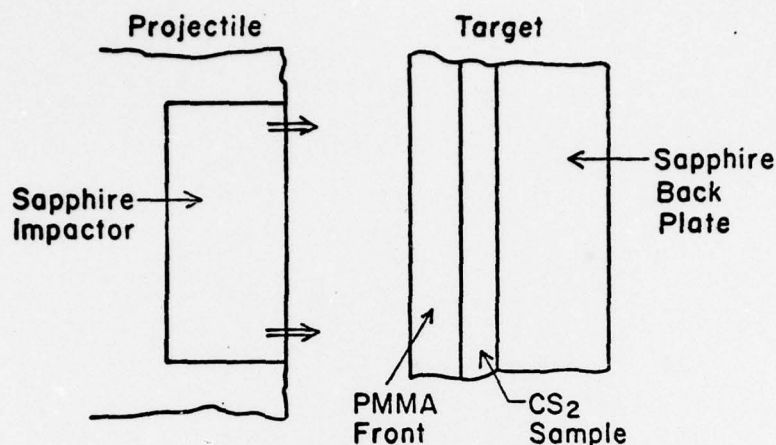

(a) Cross section of experiment

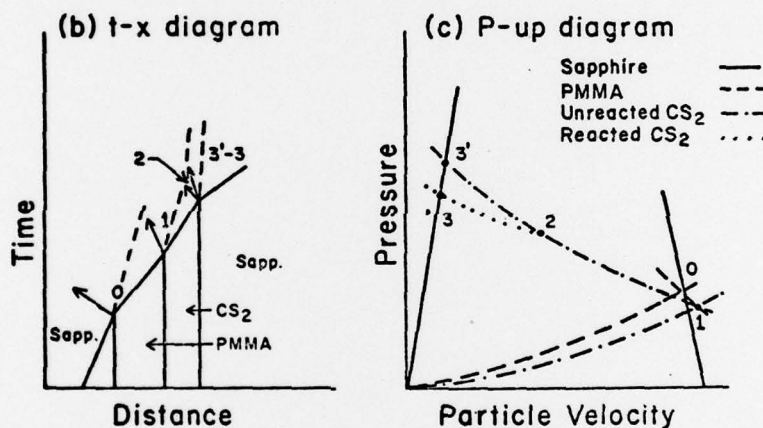


Figure 3. Experimental design.

EXPERIMENTAL RESULTS

Of all the records obtained, those obtained at the CS_2 -sapphire interface reveal most clearly the features of the reaction. An idealized record is shown in Figure 4; it displays three interesting features. First is a region of uniform particle velocity, AB, immediately following reflection. Its duration, t_i in the Figure, depends on shock pressure and temperature in unreacted CS_2 ; it is called an "induction time." Second, BC, is decay of the average particle velocity to a final uniform state, lower than the induction state by an amount Δu . There is also a characteristic time, t_{up} , associated with this change. Finally, and quite unexpectedly, is a coherent electrical signal which begins suddenly at the time particle velocity starts to decay, B, and decays in amplitude to D with a characteristic time, $t_n > t_{up}$, which also depends upon pressure and temperature in the induction state.

Because of the electrical signal it was impossible to determine the exact nature of the particle velocity decay. Data for this decay were estimated by drawing a curve through the signal at what appeared to be the mean position. Signal decay time was also estimated but it was difficult to tell the

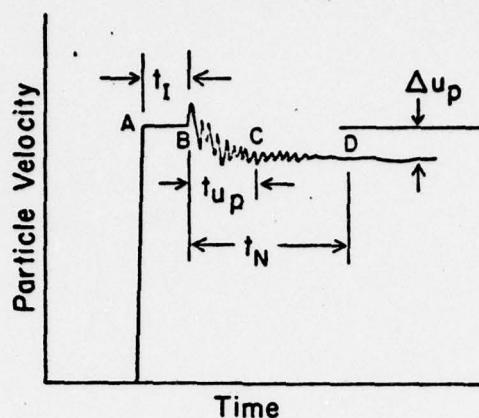


Figure 4. Idealized CS_2 -sapphire gage record. t_I is induction time, t_N is the noise decay time, t_{up} is the particle velocity decay time, and Δu_p is the particle velocity decrease.

end of the signal from normal noise on the approximately 100 millivolt signals. For many of the shots the induction time was so small that it was not resolvable in the 10 to 20 nsec risetime of the gage. Two records are shown in Figure 5. Frequency of the oscillatory signal is not periodic, but its average frequency varies from about 40 to 150 MHz among records. Induction times range from < 6 to ~ 310 nsec; $t_{up} \sim 50$ to 400 nsec; $t_N \sim 110$ to 340 nsec.

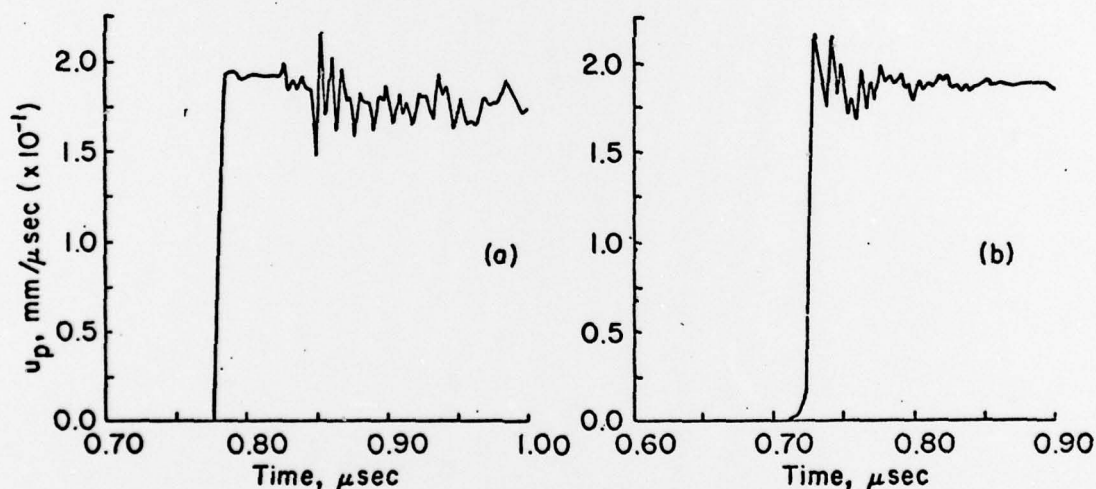


Figure 5. Records from the CS_2 -sapphire interface. (a) shock pressure is 87 kbar; (b) shock pressure is 106 kbar.

TEMPERATURE CALCULATIONS

Complete equations of state, suitable for numerical computation, have been constructed from shock and static data for CS_2 and for reaction products, assumed to be a stoichiometric mixture of carbon and sulfur. Temperatures and pressures calculated for the principal Hugoniot centered at room temperature and for reshock Hugoniots centered at various points on the principal Hugoniot, all for unreacted CS_2 , are shown in Figure 6a. States lying on the CS_2 curve at point 3' in Figure 3 are constrained to lie on the dashed line in Figure 6a. These represent metastable points in the CS_2 in the reacting

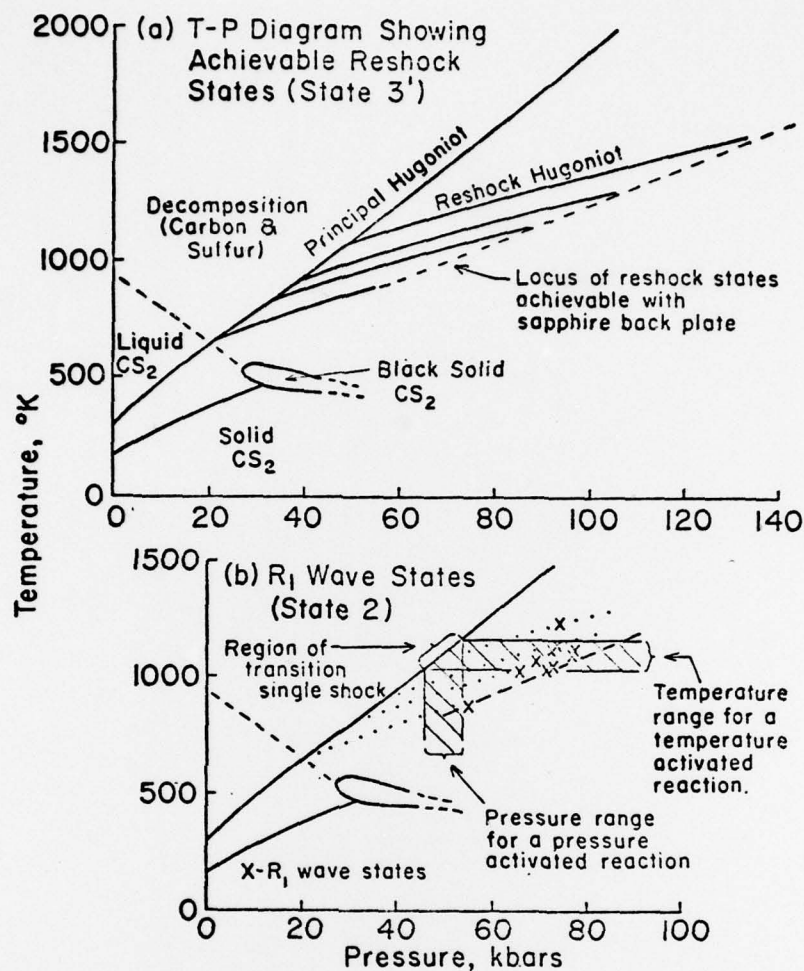


Figure 6. Temperatures and pressures in the reflected shock wave.

region but before reaction has started. In Figure 6b are plotted measured points (X) corresponding to point 2 of Figure 3. The band of pressures and temperatures indicated on the principal Hugoniot in Figure 6b represents what we believe is the region of onset of reaction in a single shock. These are somewhat lower than R. Dick's estimate of 62 kbar. If the reaction were activated solely by pressure, measured points "2" would lie in the vertical cross-hatched band. If the reaction were temperature-activated, they would lie in the horizontal band. Actually they do neither, and this is quite reasonable since activation energy can reasonably be expected to be a function of pressure. The phase diagram given by Butcher et al. is shown in Figure 6 for comparison with measured states. The measured states are well into the region of decomposition indicated by Butcher et al.

DISCUSSION

The measurements that have been made demonstrate clearly that liquid CS_2 , on being shocked to sufficiently high temperature and pressure, is decaying to a more dense state. One must be cautious in leaping to conclusions about internal mechanisms responsible for the decay, but there are some grounds for supposing that it is due to chemical decomposition instead of a phase change. These are, briefly,

- (1) Velocity-time histories recorded at the CS_2 -sapphire interface differ in form from those expected for transition. The most notable differences are induction time and the reaction electrical signal.
- (2) Calculated pressures and densities of the final states are in accord with those expected from a stoichiometric mixture of carbon and sulfur.
- (3) Pressures and temperatures fall in the region of chemical decomposition described by Butcher et al.
- (4) The array of final pressure and temperature states shown in Figure 6b appears to be more nearly in accord with characteristics of a temperature-dependent process than with a pressure dependent one.
- (5) CS_2 is chemically unstable relative to carbon and sulfur in the reaction region.

The weight of this evidence is grounds for the tentative conclusion that the observed effect is chemical in origin, probably representing decomposition to carbon and sulfur. Absolute assurance that this is so awaits more direct evidence.

The character of particle velocity records at the CS_2 -sapphire interface, viz. the existence of an induction time followed by decay of pressure and particle velocity, suggests that there may be two principal stages in the reaction. The initial reaction proceeds without significantly affecting pressure, and the second is associated with a decrease in pressure and increase in density. Here, too, a more detailed analysis is required before firm conclusions are possible.

Presence of the electrical signal is unexpected and puzzling. Its almost-periodic nature implies a coherent motion of electrified particles, which may be induced by the magnetic field of 2000 gauss used for the EMV gauge. If the average frequency of the signal is taken to be 100 MHz and the signal is assumed to represent the cyclotron frequency of a particle of mass M and charge ze in the 2000 gauss field, then $M/z \approx 56$ electron masses, which corresponds to nothing reasonable. Some experiments were done to affirm that the reaction is the source of the signal. The signal is picked up by a probe outside the CS_2 at the instant the signal appears at the CS_2 -sapphire gauge. Shorting pins and other sources of electrical noise were removed from the experiment. PMMA was substituted for CS_2 and no noise was observed. The possibility that this electrical signal may provide a means of monitoring the reaction appears real, but much further work will be required to identify its source.

The work reported here is a first step in a study of shock-induced reactions in CS_2 . It will provide the basis for further and more detailed studies of microscopic aspects of the transition.

REFERENCES

1. D. Bancroft, E. L. Peterson and S. Minshall, J. Appl. Phys. 27, 291 (1956).
2. P. S. DeCarli and J. C. Jamieson, Science 133, 1821 (1961).
3. Ya. B. Zel'dovich and Yu. P. Razier, "Physical and Chemical Kinetics in Hydrodynamic Processes," in Physics of Shock Waves and High-Temperature Hydrodynamic Phenomena, ed. by W. D. Hayes and R. F. Probstein (Academic Press, New York, 1967) Vol 2, Chapter 8.
4. Detonation studies are explicitly excluded from this discussion of shock-induced reactions
5. S. S. Batsanov, S. S. Derbenjova, G. S. Doronin and E. V. Dulepov, "Formation of Defects in Solids under Shock Wave," in Behavior of Dense Media Under High Dynamic Pressures, Proceedings of the Symposium H.D.P.I.U.T.A. M., Paris, Sept. 11-15, 1967 (Gordon and Breach, New York, 1968).
6. A. Deribas, N. Dobretsoc, V. Kudinov, V. Maly, A. Serebrjakov and A. Staver, "Shock Wave Compression of Some Inorganic Compositions," op. cit. pp. 385-388.
7. A. A. Deribas, E. D. Ruchkin, V. S. Filatkina and L. A. Khripin, Combustion, Explosion, and Shock Waves 2, 91 (1966).
8. J. M. Walsh and M. H. Rice, J. Chem. Phys. 26, 815 (1957).
9. S. B. Kormer, K. B. Yushko and G. V. Krishkevich, Soc. Phys. JETP 27, 879 (1968).
10. S. B. Kormer, Sov. Phys. Uspek. II, 229 (1968).
11. D. G. Doran and T. J. Ahrens, Stanford Research Institute Report PG0-4100 (1963).
12. R. D. Dick, Bull. Am. Phys. Soc. 9, 547 (1964).
13. A. C. Mitchell and R. N. Keeler, Rev. Sci. Instrum. 39, 513 (1968).
14. H. G. David and S. D. Hamann, Trans. Faraday Soc. 55, 72 (1959).
15. H. G. David and S. D. Hamann, Trans. Faraday Soc. 56, 1043 (1960).
16. S. D. Hamann and M. Linton, Trans. Faraday Soc. 62, 2234 (1966).
17. O. B. Yakusheva, V. V. Yakushev and A. N. Dremin, High Temp.-High Pres. 3, 261 (1971).
18. R. D. Dick, Bull. Am. Phys. Soc. 13, 579 (1968).
19. R. D. Dick, J. Chem. Phys. 52, 6021 (1970).
20. R. D. Dick, "Shock Wave Compression of Benzene, Carbon Disulfide, Carbon Tetrachloride, and Liquid Nitrogen," Los Alamos Scientific Lab. Report LA-3915 (1968).
21. A. N. Afanasenkov, I. M. Voskoboinikov, M. F. Gogulya and A. I. Karkov, Fiz. Goreviya i Vzryva 10, 392 (1974).
22. V. V. Yakushev, S. S. Nabatov and O. B. Yakusheva, Fiz. Goreviya i Vzryva 10, 583 (1974).
23. E. G. Butcher, M. Alsop, J. A. Weston and H. A. Gebbie, Nature 199, 756 (1963).

DISTRIBUTION LIST

Office of Naval Research
Code 473
Arlington, VA 22217
Attn: Dr. R. Miller

Naval Air Systems Command
Code 440
Washington, DC 20360
Attn: Dr. H. Rosenwasser

John Hopkins Univ. APL
Chemical Propulsion Info. Agency
John Hopkins Road
Laurel, MD 20810
Attn: T. W. Christian

Office of Naval Research
1030 East Green Street
Pasadena, CA 91106
Attn: Dr. R. Marcus

Naval Sea Systems Command
SEA-0331
Washington, DC 20362
Attn: Mr. J. Murrin

Naval Surface Weapons Center
Code 240
Silver Spring MD 20910
Attn: S. J. Jacobs

Office of Naval Research
495 Summer Street
Boston, MA 02210
Attn: Dr. L.H. Peebles

Naval Sea Systems Command
SEA-0332
Washington, DC 20362
Attn: Dr. M. Stosz

Princeton University
Forrestal Campus Library
P.O. Box 710
Princeton, NJ 08540

Office of Naval Research
536 S. Clark Street
Chicago, IL 60605
Attn: Dr. J. Smith

Naval Surface Weapons Center
Research and Tech. Dept.-WR
Silver Spring, MD 20910

Technical Director, Proj. Squid
Purdue University
Lafayette, IN 47907
Attn: Prof. S.N.B. Murthy

Defense Documentation Center
Bldg. 5
Cameron Station
Alexandria, VA 22314

Naval Weapons Center
Attn: Ronald L. Derr
Code 608
China Lake, DA 93555

Army Ballistic Research Lab.
Aberdeen Proving Grounds, MD
21005
Attn: A.W. Barrows/DRDAR-BLP

Office of Naval Research Res. R.
University of Washington
3710 Brooklyn Ave. NE. Unit #2
Seattle, WA 98195

Air Force Office of Sci. Res.
Directorate of Aerospace Sci.
Bolling Air Force Base
Washington, DC 20332

U.S. Army Research Office
Physics Division
P.O. Box 12211
Research Triangle Park, NC
27709

U.S. Naval Research Lab.
Code 2627
Washington, DC 20375

U.S. Army Research Office
Chemistry Division
P.O. Box 12211
Research Triangle Park, NC
27709

Air Force Office of Sci. Res.
Directorate of Chemical Sci.
Bolling Air Force Base
Washington, DC 20332

U.S. Naval Research Lab.
Code 2629
Washington, DC 20375

AFRPL (MKP)
Edwards, CA 93523
Attn: Mr. R. Geisler

Air Force Office of Sci. Res.
Directorate of Physics
Bolling Air Force Base
Washington, DC 20332

Naval Weapons Center
Research Department
Code 60
China Lake, CA 93555

Naval Research Lab.
Code 6100
Washington, DC 20375

Commander
Naval Weapons Center
China Lake, CA 93555
Attn: D. Lind

Hercules Incorporated
Allegany Ballistics Laboratory
P.O. Box 210
Cumberland, MD 21502
Attn: Library

J. Kury
Lawrence Livermore Lab.
University of CA
P.O. Box 808
Livermore, CA 94550

Dr. L. Zernow
Shock Hyrdodynamics, Inc.
15010 Ventura Bl.
Sherman Oaks, CA 91403

Commanding Officer
Picatinny Arsenal
Dover, NJ 07801

D. Hayes
Sandia Laboratories
P.O. Box 5800
Albuquerque, NM 87185

D. Curran
Stanford Research Institute
333 Ravenswood Ave.
Menlo Park, CA 94025

J. Hershokowitz
Picatinny Arsenal
Dover, NJ 07801

Director
Los Alamos Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

M. Cowperthwaite
Stanford Research Institute
333 Ravenswood Ave.
Menlo Park, CA 94025

SARPA-TS-S #59
Picatinny Arsenal
Dover, NJ 07801

Library
Los Alamos Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

Rohm and Haas
Huntsville Defence Contract O
723-A Arcadia Circle
Huntsville, AL 35801

M. Finger
Lawrence Livermore Lab.
University of CA
P.O. Box 808
Livermore, CA 94550

L. C. Smith
Los Alamos Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

H. M. Schuey
Huntsville Defense Contract O
723-A Arcadia Circle
Hunstville, AL 35801

E. James
Lawrence Livermore Lab.
University of CA
P.O. Box 808
Livermore, Ca 94550

B. G. Craig
Los Alamos Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

E. Lee
Lawrence Livermore Lab.
University of CA
P.O. Box 808
Livermore, CA 94550

A. Popolato
Los Alamos Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545